


# SYNTHETIC GRASS BASIC INSTALLATION

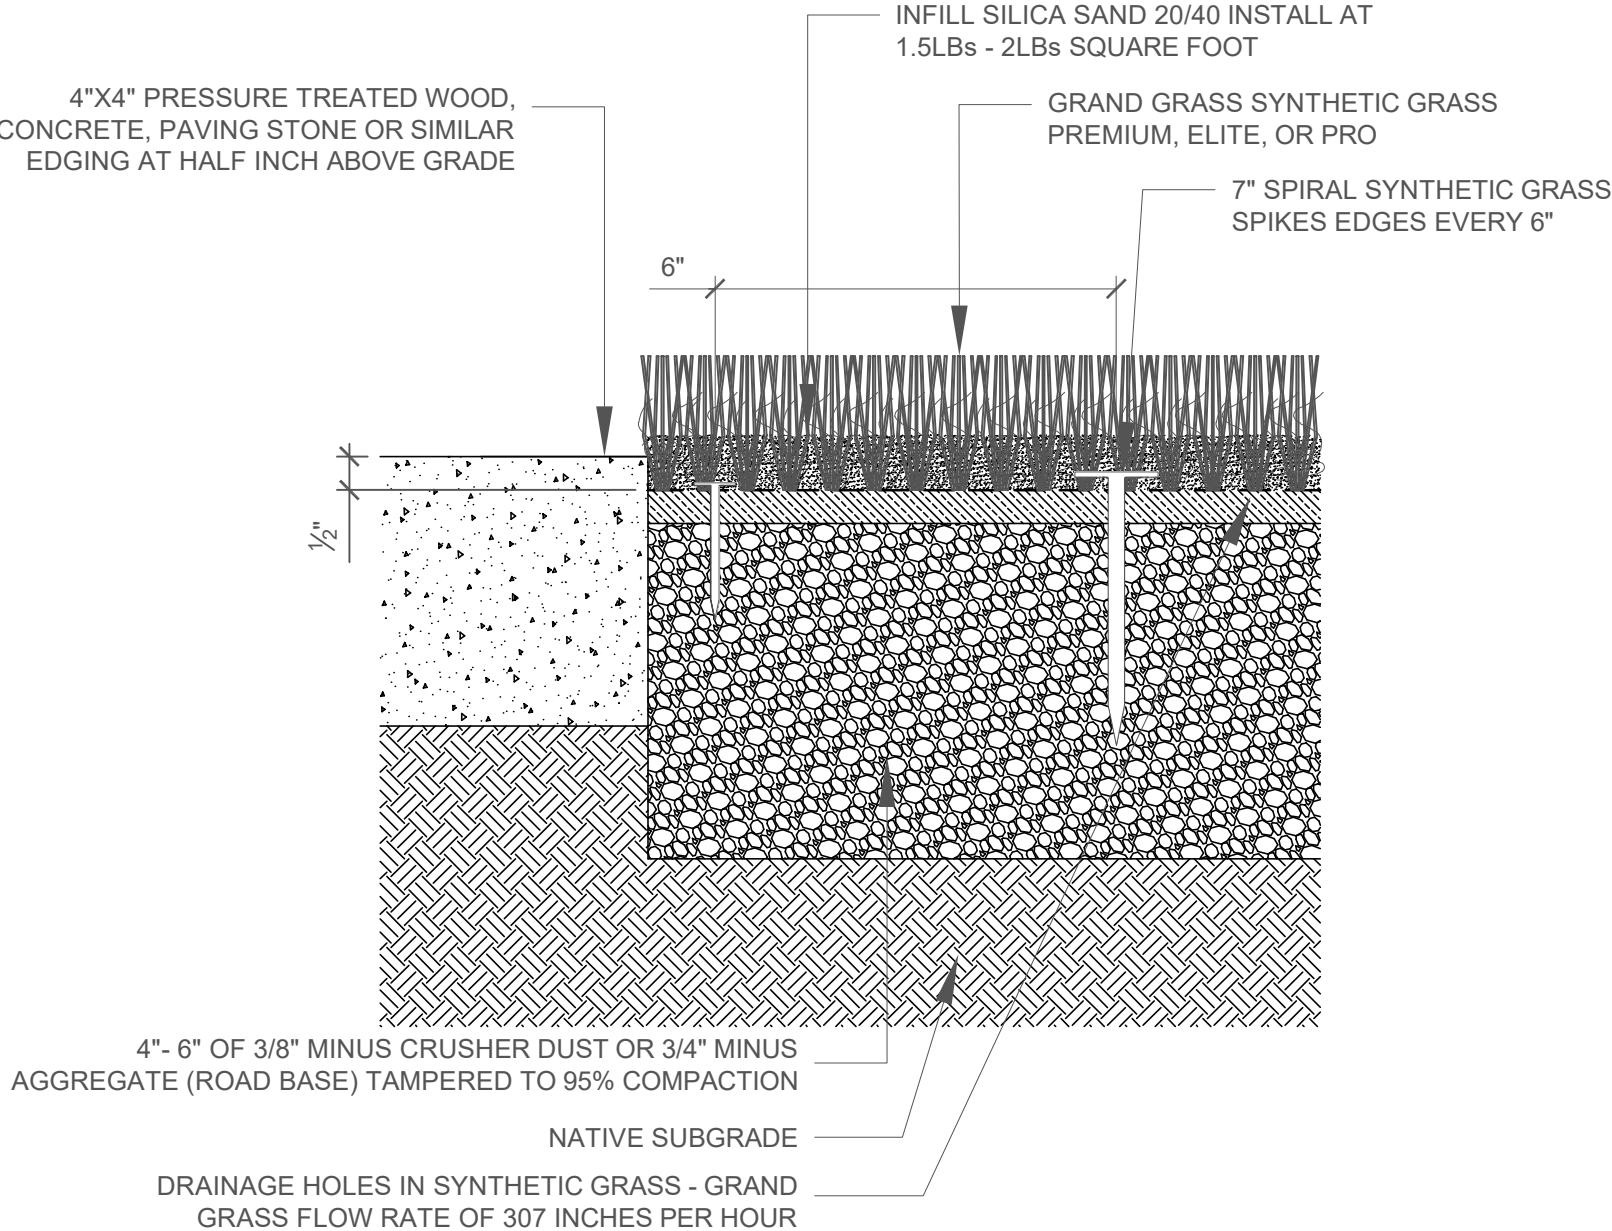

## GENERAL NOTES:

- ENSURE AGGREGATE FOUNDATION IS SMOOTH AND FLAT
- ENSURE AGGREGATE BASE IS COMPACTED TO 95% COMPACTION
- ALL SYNTHETIC GRASS FIBERS TO BE FACING THE SAME DIRECTION
- ALL GRASS SEAMS MUST BE SECURED USING SYNTHETIC GRASS GLUE AND SEAM TAPE. NAIL SEAM EVERY 6" WITH 4" SYNTHETIC GRASS NAILS. ENSURE FIRST FOUR STITCHES ARE CUT FROM EACH SIDE WHEN SEAMING TWO PIECES TOGETHER IN A PARALLEL SEAM
- INFILL 20/40 SILICA SAND ONTO TOP OF GRASS, USE BLOWER AND POWER BROOM TO PUSH THAT SAND TO THE BOTTOM LAYER OF GRASS. ENSURE 1.5LBs - 2LBs OF 20/40 SILICA SAND IS APPLIED EVENLY